

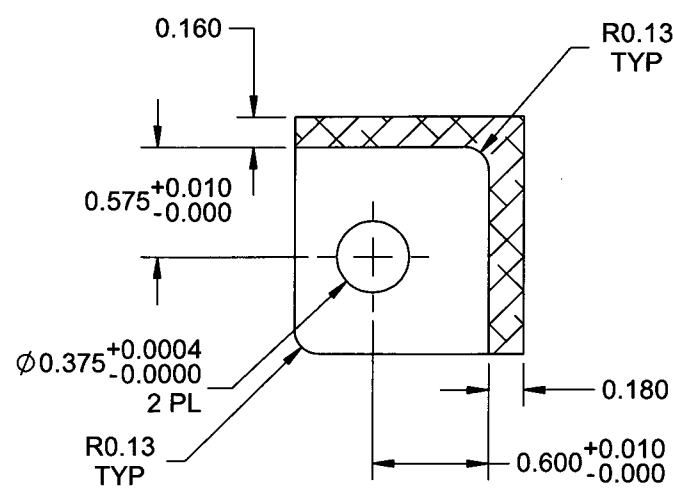
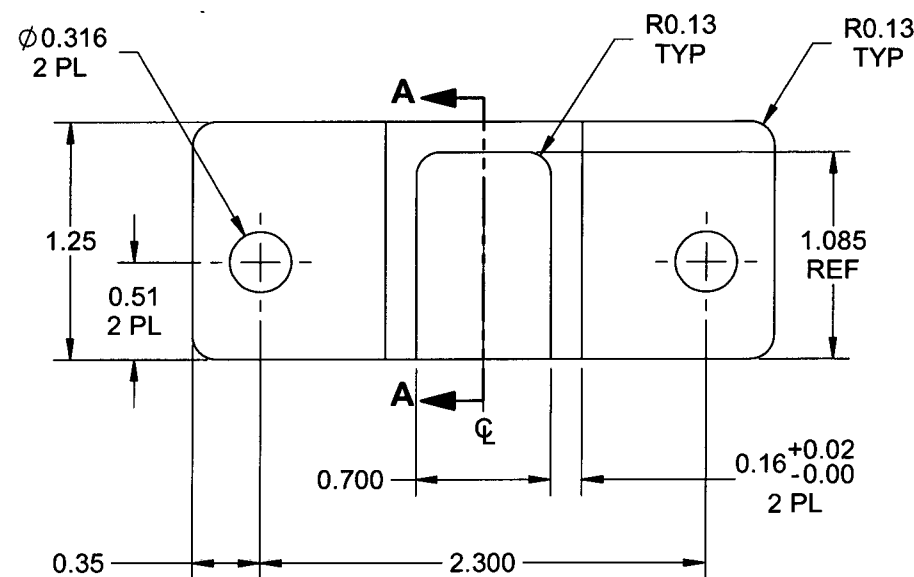


GRAIN  
DIRECTION



**SECTION A-A**

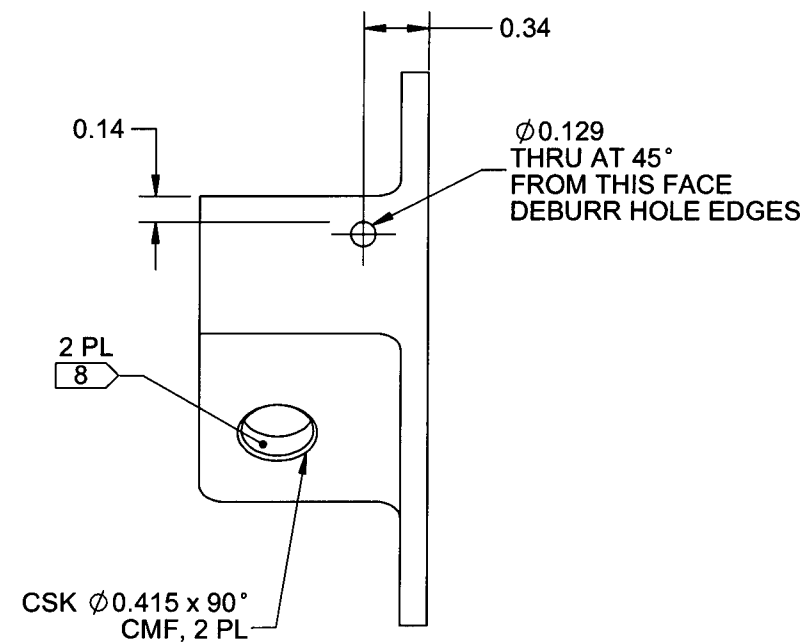

**AUXILIARY VIEW**

**D5347-1 MOUNTING BRACKET**

**NOTES:**

- 1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM BAR  
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)  
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)  
OR ASTM B211 OR ASTM B221  
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1  
POWDER COAT WHITE (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: 0.11 lbs
- 8) MASK HOLE PRIOR TO POWDER COAT

RELEASED  
2016 -01- 21

APPROVED

DESIGN	RF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO. <b>D5347</b>	REV. A
MFG. APPR.	JLM	SHEET 2 OF 2	
APPROVED	HS	TITLE <b>MOUNTING BRACKET ASSY</b>	SCALE NTS
DE APPR.	DS	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	
DATE	15.08.10		